

ELECTRIC TORQUE
WRENCH







ELECTRIC TORQUE WRENCH Y SERIES

CHARACTERISTICS


Small volume, light weight, easy to operate.
Adopt the digital controller, high precision.

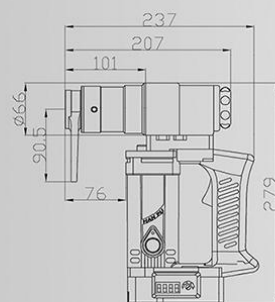

ELECTRIC TORQUE WRENCH Y SERIES **TN-3B**

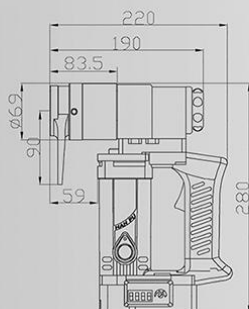

ELECTRIC TORQUE WRENCH Y SERIES **TN-5B**

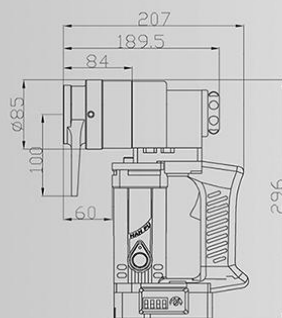

ELECTRIC TORQUE WRENCH Y SERIES **TN-9B**

MODEL	FREQ	VOLTAGE	MAX CURRENT	MAX POWER CONSUMPTION	TORQUE RANGE	RO SPEED (min-1)	WEIGHT (MAIN BODY)	PROTECT CLASS	ADAPTABLE BOLTS DIA		
									S-10T	A325	A490
TN-3B	50-60Hz	230V 115V	6A 12A	1300W	100-300N.m	24rpm	4.4KG	Double Insulation	M12 M16	1/2" 5/8"	1/2"
TN-5B	50-60Hz	230V 115V	7A 14A	1650W	200-500N.m	15.5rpm	4.5KG	Double Insulation	M16 M20	5/8" 3/4"	5/8"
TN-9B	50-60Hz	230V 115V	7A 14A	1650W	400-900N.m	9.5rpm	5.3KG	Double Insulation	M20 M22 M24	3/4" 7/8" 1"	3/4" 7/8"

1 socket provided for free per TN series Torque Wrench.

>> > >>> WWW.HPTORQUEWRENCH.COM


<mailto:info@hanputool.com>




ELECTRIC TORQUE WRENCH Y SERIES

CHARACTERISTICS


Small size and light weight, suitable for high-altitude and narrow space operations,
Adopts digital control, with high repeatability accuracy and good stability.
Torque and rotation angle switching are controlled separately, and torque and rotation angle can also be controlled together.



ELECTRIC TORQUE WRENCH Y **TN-7LP**



ELECTRIC TORQUE WRENCH Y **TN-12LP**

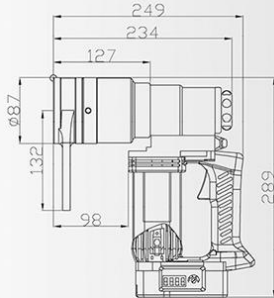


ELECTRIC TORQUE WRENCH Y **TN-21LP**


MODEL	FREQ	VOLTAGE	MAX CURRENT	MAX POWER CONSUMPTION	TORQUE RANGE	RO SPEED (min-1)	WEIGHT (MAIN BODY)	PROTECT CLASS	ADAPTABLE BOLTS DIA		
TN-7LP	50-60Hz	230V 115V	7A 14A	1650W	350-700N.m	15rpm	4.7KG	Double Insulation	S-10T M20 M22	3/4" 7/8"	3/4"
TN-12LP	50-60Hz	230V 115V	8A 16A	1800W	500-1200N.m	9rpm	5.5KG	Double Insulation	M22 M24	7/8" 1"	7/8" 1"
TN-21LP	50-60Hz	230V 115V	8A 16A	1800W	900-2100N.m	6rpm	6.6KG	Double Insulation	M27 M30	1-1/8" 1-1/4"	1-1/8" 1-1/4"

1 socket provided for free per TN series Torque Wrench.


ELECTRIC TORQUE WRENCH Y SERIES

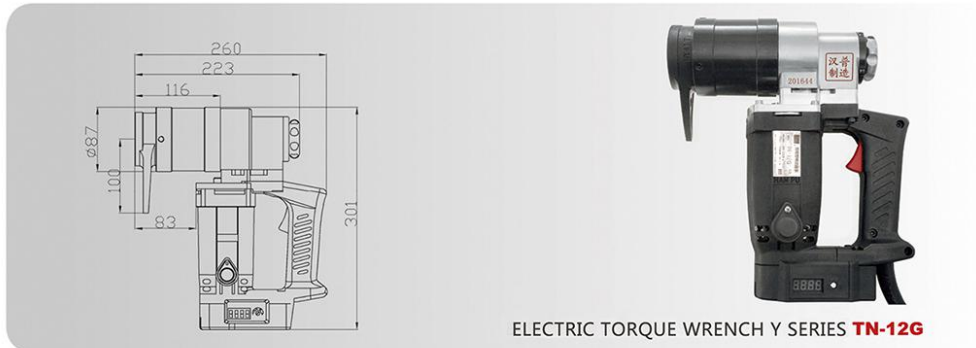

ELECTRIC TORQUE WRENCH Y SERIES **TN-12G**

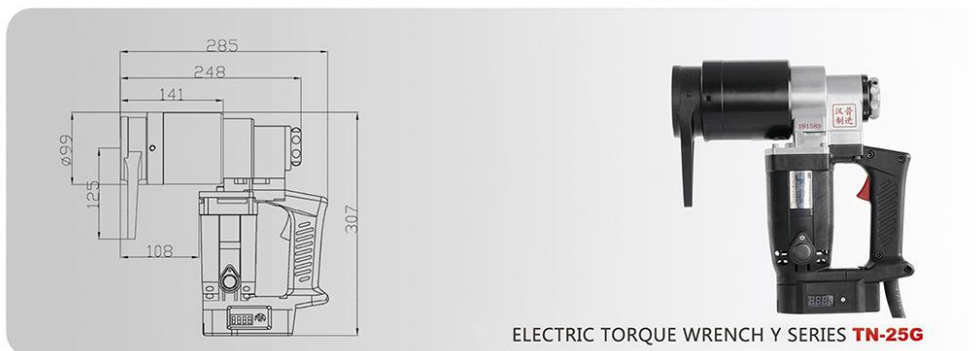

ELECTRIC TORQUE WRENCH Y SERIES **TN-25G**

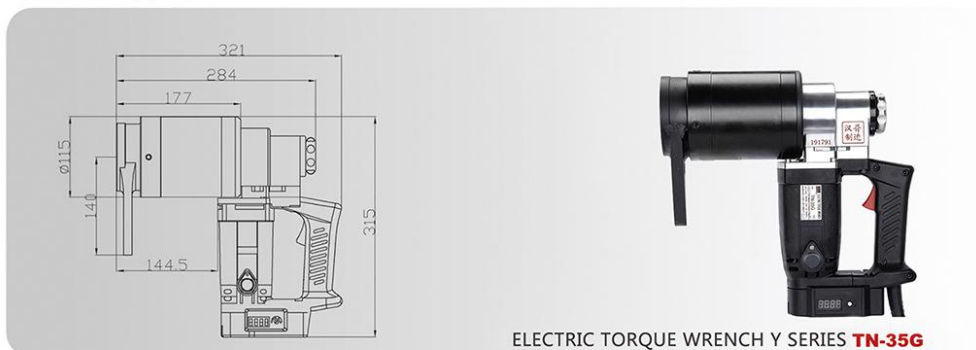

ELECTRIC TORQUE WRENCH Y SERIES **TN-35G**

MODEL	FREQ	VOLTAGE	MAX CURRENT	MAX POWRE CONSUMPTION	TORQUE RANGE	RO SPEED (MIN-1)	WEIGHT (MAIN BODY)	PROTECT CLASS	ADAPTABLE BOLTS DIA		
									S-10T	A325	A490
TN-12G	50-60Hz	230V 115V	12A 24A	2800W	500-1200N.m	10.5rpm	7KG	Double insulation	M22 M24	7/8" 1"	7/8" 1"
TN-25G	50-60Hz	230V 115V	12A 24A	2800W	1000-2500N.m	5rpm	8.5KG	Double insulation	M27 M30 M33	1-1/8" 1-1/4" 1-3/8"	1-1/8" 1-1/4"
TN-35G	50-60Hz	230V 115V	12A 24A	2800W	1700-3500N.m	2.5rpm	12KG	Double insulation	M30 M33 M36	1-1/4" 1-3/8" 1-1/2"	1-1/4" 1-3/8"

1 socket provided for free per TN series Torque Wrench.

>> > >>> WWW.HPTORQUEWRENCH.COM


<mailto:info@hanputool.com>

12 ELECTRIC TORQUE WRENCH L SERIES




CHARACTERISTICS


Small volume, light weight, easy to operate.
Adopt the digital controller, high precision.



ELECTRIC TORQUE WRENCH L SERIES **TL-3B**



ELECTRIC TORQUE WRENCH L SERIES **TL-5B**

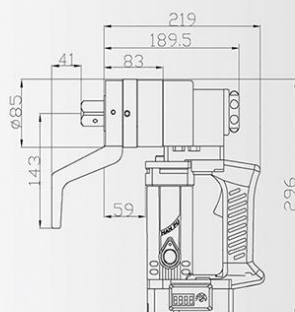

ELECTRIC TORQUE WRENCH L SERIES **TL-9B**

MODEL	FREQ	VOLTAGE	MAX CURRENT	MAX POWRE CONSUMPTION	TORQUE RANGE	RO SPEED (MIN-1)	WEIGHT (MAIN BODY)	SQUARE DRIVE	PROTECT CLASS	ADAPTABLE BOLTS DIA		
										S-10T	A325	A490
TL-3B	50-60Hz	230V 115V	6A 12A	1300W	100-300N.m	24rpm	4.4KG	19×19mm (3/4"×3/4")	Double insulation	M12 M16	1/2" 5/8"	1/2"
TL-5B	50-60Hz	230V 115V	7A 14A	1650W	200-500N.m	15.5rpm	4.5KG	19×19mm (3/4"×3/4")	Double insulation	M16 M20	5/8" 3/4"	5/8"
TL-9B	50-60Hz	230V 115V	7A 14A	1650W	400-900N.m	9.5rpm	5.3KG	25.4×25.4mm (1"×1")	Double insulation	M20 M22 M24	3/4" 7/8" 1"	3/4" 7/8"

No socket provided for free for TL series Torque Wrenches.

13


ELECTRIC TORQUE WRENCH L SERIES

CHARACTERISTICS


Small size and light weight, suitable for high-altitude and narrow space operations,

Adopts digital control, with high repeatability accuracy and good stability.


Torque and rotation angle switching are controlled separately, and torque and rotation angle can also be controlled together.

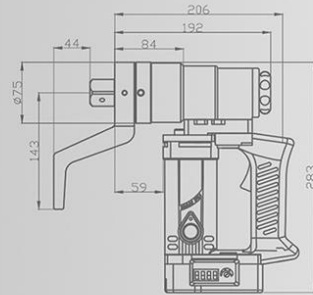

ELECTRIC TORQUE WRENCH L SERIES **TL-7LP**

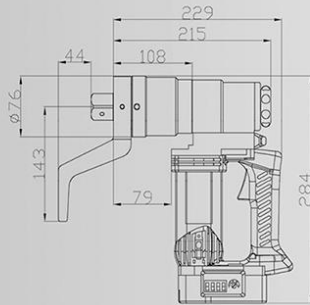

ELECTRIC TORQUE WRENCH L SERIES **TL-12LP**

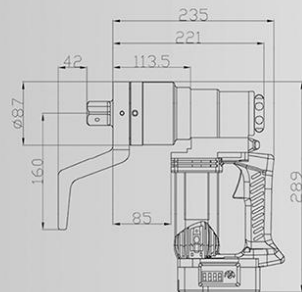

ELECTRIC TORQUE WRENCH L SERIES **TL-21LP**


MODEL	FREQ	VOLTAGE	MAX CURRENT	MAX POWER CONSUMPTION	TORQUE RANGE	RO SPEED (min-1)	WEIGHT (MAIN BODY)	SQUARE DRIVE	PROTECT CLASS	ADAPTABLE BOLTS DIA		
										S-10T	A325	A490
TL-7LP	50-60Hz	230V 115V	7A 14A	1650W	350-700N.m	15rpm	4.7KG	25.4×25.4mm (1"×1")	Double Insulation	M20 M22	3/4" 7/8"	3/4"
TL-12LP	50-60Hz	230V 115V	8A 16A	1800W	500-1200N.m	9rpm	5.5KG	25.4×25.4mm (1"×1")	Double Insulation	M22 M24	7/8" 1"	7/8" 1"
TL-21LP	50-60Hz	230V 115V	8A 16A	1800W	900-2100N.m	6rpm	6.6KG	25.4×25.4mm (1"×1")	Double Insulation	M27 M30	1-1/8" 1-1/4"	1-1/8" 1-1/4"

No socket provided for free for TL series Torque Wrenches.


>> > >>> WWW.HPTORQUEWRENCH.COM

<mailto:info@hanputool.com>


1 4 ELECTRIC TORQUE WRENCH L SERIES




ELECTRIC TORQUE WRENCH L SERIES **TL-25G**



ELECTRIC TORQUE WRENCH L SERIES **TL-35G**



ELECTRIC TORQUE WRENCH L SERIES **TL-60G**



ELECTRIC TORQUE WRENCH L SERIES **TL-100G**

MODEL	FREQ	VOLTAGE	MAX CURRENT	MAX POWER CONSUMPTION	TORQUE RANGE	RO SPEED (min-1)	WEIGHT (MAIN BODY)	SQUARE DRIVE	PROTECT CLASS	ADAPTABLE BOLTS DIA		
										S-10T	A325	A490
TL-25G	50-60Hz	230V 115V	12A 24A	2800W	1000-2500N.m	5rpm	9.0KG	25.4mm x 25.4mm (1" x 1")	Double Insulation	M27 M30 M33	1-1/8" 1-1/4" 1-3/8"	1-1/8" 1-1/4"
TL-35G	50-60Hz	230V 115V	12A 24A	2800W	1700-3500N.m	2.5rpm	12KG	38mm x 38mm (1-1/2" x 1-1/2")	Double Insulation	M30 M33 M36	1-1/4" 1-3/8" 1-1/2"	1-1/4" 1-3/8"
TL-60G	50-60Hz	230V 115V	12A 24A	2800W	2000-6000N.m	0.6rpm	18.5KG	38mm x 38mm (1-1/2" x 1-1/2")	Double Insulation	M42 M45 M48	1-5/8" 1-3/4" 2"	1-5/8" 1-3/4"
TL-100G	50-60Hz	230V 115V	12A 24A	2800W	5000-10000N.m	0.3rpm	21KG	38mm x 38mm (1-1/2" x 1-1/2")	Double Insulation	M48 M52 M56	2" 2-1/8" 2-1/4"	2" 2-1/8"

No socket provided for free for TL series Torque Wrenches.